

## A mathematical model of movement in virtual reality through thoughts

Ivan Trenchev<sup>1</sup>, Radoslav Mavrevski<sup>2</sup>, Metodi Traykov<sup>3</sup>, Ilire Zajmi-Rugova<sup>4</sup>

<sup>1,4</sup>University of Library Studies and Information Technologies, Bulgaria

<sup>1</sup>Department of Electrical Engineering, Electronics and Automatics, South-West University "Neofit Rilski", Bulgaria

<sup>2,3</sup>Department of Informatics, South-West University "Neofit Rilski", Bulgaria

<sup>3</sup>Department of Informatics, New Bulgarian University, Bulgaria

---

### Article Info

#### Article history:

Received Nov 15, 2019

Revised Jun 4, 2020

Accepted Jun 15, 2020

---

#### Keywords:

Brain-computer interface

Brain chain

Virtual reality

---

### ABSTRACT

In this article, we'll introduce ways to build virtual worlds through different computer programs. We will show the method of rectangles for analyzing data obtained from the electroencephalogram. We will demonstrate basic mathematical models for movement prediction in a system of virtual reality. Using this data, the main transformations are possible-change of position and rotation (change of orientation).

Copyright © 2020 Institute of Advanced Engineering and Science.  
All rights reserved.

---

### Corresponding Author:

Ivan Trenchev,

University of Library Studies and Information Technologies,

UniBIT, Sofia, p.k. 1784, 119 Tsarigradsko Shosse Blvd, Bulgaria.

Email: i.trenchev@unibit.bg

---

## 1. INTRODUCTION

There are many discussions about the origin of the term “virtual reality”. One of them is that it dates back to the German philosopher Immanuel Kant [1-5]. The exact definition is rather philosophical and it does not include terminology. The modern use of this term was presented by Jason Lanier in in the 1980s. Nowadays this term is quite extensive and has become very popular. Initially, a virtual environment was used but now most of the researches prefer to use the term “virtual reality” instead. This environment should not be considered only as “virtual” in the current definition [6-8]. Another widely used concept is advanced reality (AR). This concept is applied for systems in which most of the objects are visualized through glass, cameras or eyeglasses. In most cases, these virtual ob-jects looks like they are added to the user’s virtual world. Mixed reality (MR) is used as a summary of VR, AR and normal reality. This term VR/AR/MR is mostly used to denote all forms. In this paper, AR, MR, telepresence and tele-operation are going to be perfect examples of VR [6-8].

The term virtual reality is quite contradictory. Burbules finds a solution to this problem by proposing the alternative term-virtuality. We make the follow-ing statement that the virtual word refers to the perceptions as a part of VR’s ideology [6]. In most cases, VR includes a very important component: interaction. In other words, if other sensors participate in the virtual word. If only the eyes are in-voled, then the VR system is called an open loop, otherwise-closed. In the second case, the human body has partial control of the stimulation. This incorporates the body movements, including the head, eyes, hands or legs. The other opportunities are: voice commands, heart rate, body temperature.

Many scientists build the VR system as a part of experiment. This is necessary if it is part of scientific issue or hypothesis. Many of these attempts are unsuccessful. The aim of this study is to present a metropolis for moving into the virtual world through human thoughts. We use data from company Emotiv, for manage movement in MR [3, 4]. Figure 1 shows the mask through which we receive data from the EEG signal.



Figure 1. Emotiv-brain controlled technology

## 2. RESEARCH METHOD

In the past twenty years, the studies of brain-computer interface (BCI) studies appear. This new technology will allow paralyzed people to connect with electronic devices in order to create robotic hands. In this study, we present a model for using this data for entertainment [9-16]. The Electroencephalogram (EEG) is the most common method for obtaining data from BCI. EEG is nothing but recorded electrical signal, generated by the brain. The first such report was published in 1929. This allowed people to observe and analyze the effects of the brain [17].

With its function, human brain generates millions of small electrical voltages. The combination of these fields can be detected by electrodes attached to the scalp. The amplitude of these signals varies from  $1 \mu V$  to  $100 \mu V$ . EEG shows wide variations in amplitude depending on external stimulation and various internal mental states. Various methods are used to obtain EEG signals.

We use the non-invasive EEG recording. These are signals, captured with electrodes attached to the scalp. In our case, the used electrodes are small metal discs. They are made of stainless steel, tin, gold or silver coated with a silver chloride coating. Exemplary input data are presented in the Table 1 [17-22]. Table 1 presents some of the eeg signals of the brain through which we control the virtual camera. Through the algorithms we have developed, we can classify these signals and move the camera in four directions.

Table 1. Emotiv data in motion analysis

AF3	F7	F3	F5	T7	P7	O1
4109,49	4167,05	4131,28	4133,08	4111,67	4118,59	4112,18
4113,97	4166,92	4131,67	4134,49	4113,08	4114,87	4111,67
4112,69	4154,87	4134,10	4127,56	4109,74	4113,33	4110,64
4111,67	4143,08	4128,46	4118,46	4110,38	4112,82	4114,87
4112,18	4139,10	4115,51	4112,95	4114,62	4112,69	4115,64
4110,00	4138,33	4115,90	4114,36	4113,59	4118,46	4110,51
4115,13	4138,72	4125,38	4120,51	4111,15	4121,92	4110,64
4111,54	4139,74	4122,69	4118,97	4110,77	4114,74	4111,54
4105,38	4139,62	4116,67	4116,67	4112,18	4112,69	4113,72
4111,03	4139,36	4113,85	4117,82	4110,64	4120,13	4114,10
O2	P8	T8	FC6	F4	F8	AF4
4108,33	4118,46	4120,64	4112,95	4105,00	4107,05	4126,41
4109,23	4119,36	4120,64	4114,23	4103,33	4105,26	4124,49
4115,51	4124,62	4120,64	4106,54	4105,13	4111,03	4126,28
4112,95	4121,41	4120,64	4105,77	4098,21	4100,26	4123,33
4097,44	4108,08	4120,64	4110,77	4082,95	4072,31	4107,82
4093,97	4104,23	4120,64	4109,36	4080,90	4065,90	4104,10
4105,77	4110,38	4120,64	4106,67	4092,05	4079,74	4114,10
4106,03	4108,85	4120,64	4111,03	4094,23	4080,13	4114,49
4099,74	4104,49	4120,64	4117,05	4087,44	4073,46	4108,21
4104,10	4108,08	4120,64	4112,05	4083,72	4077,95	4106,79

### 3. RESULTS AND DISCUSSION

Our aim is by using brainwave data to be able to move in the virtual world. In our experiment we use three directions: forward, left and right [21]. In Figures 2 and 3 we present two views in a system of virtual reality from the 3D social network second life.



Figure 2. View of second life



Figure 3. View of second life

We can consider the input data as random signals. It is a signal that is a function of time. Their values are previously unknown. This type of signal expresses an accidental physical phenomenon or physical process. When random signal is registered, only one of the random process outputs is realized. It is possible to do this only after multiple repetition of observations and the calculation of certain statistical characteristics of the signal conversion set [23].

The random stationary signals keep their own statistical characteristics in the sequential conversions of the random process [20]. The digital signal is typically set in the form of discrete series of numerical data: a numerical array of consecutive arithmetic values for  $\Delta = \text{const}$ , but generally the signal can also be given in the form of tables of arbitrary values of the argument [23-25].

The analysis of the input data can be presented as NP task. The reason of this is the high volatility and the different examined people. They give different brain signals in the same kind of external conditions. For example, in our experiments in training a subject man: driving the cursor in three directions-forward, left and right. When a woman appear, the data changes. The described EEG data needs a proper analysis and interpretation in order to solve the above-mentioned tasks [25].

The methodology for extraction of dependencies-clustering is applied to the EEG data.

*For this reason, we first train our model and then we classify the results.*

*350 Treaning points*

*The number of points in Class L is: 150*

*The number of points in Class N is: 150*

*The number of points in Class R is: 150*

*Three experiments were conducted*

*Average values for 1 experiments.*

*30,21% (TPR) from test points are CORRECTLY classified!*

*69,79% (FPR) from test points are WRONGLY classified!*

*Average values for 2 experiments.*

*31,58% (TPR) from test points are CORRECTLY classified!*

*68,42% (FPR) from test points are WRONGLY classified!*

*Average values for 3 experiments.*

*32,05% (TPR) from test points are CORRECTLY classified!*

*67,95% (FPR) from test points are WRONGLY classified!*

Obviously, the results are not very good. The reason to do these experiments is following [25]. Our bodies are not designed for the virtual world. These artificial incentives very often violate biological mechanisms that have evolved for hundreds of millions of years. We very often give information to the brain that is not compatible with its perceptions. There are cases that our bodies cannot adapt to the new environment. Unfortunately in many cases our body responds through headaches or increased fatigue. VR disease, which usually includes symptoms of dizziness and nausea, is described [16, 18, 19, 20].

In order to answer the above-mentioned questions, we should consider: 1) the physiology of the human body, including sensory organs and neural pathways, 2) to examine the basic theories of experimental perceptive psychology, and 3) the construction of a VR system and the resulting of these consequences or side effects.

Our goal is to be able to manage VR movement in real time, through brain returns. Some studies have shown that if you control the movement in a virtual environment, some side effects such as nausea, pain and more can be avoided [16]. In our future researches we plan to use filtering such as discrete cosine transform (DCT), discrete wavelet transform (DWT) and classification methods K-nearest neighbor, linear discriminant analysis (LDA), Naive bayes and others. Our goal is to use real-time detection of signals. This will allow us to actually move the camera in Unreal engine [22]. The movement of the virtual camera is done in the Unreal engine system. The movement itself is implemented through built-in classes but C ++. Our simulations were performed using the art-generated simulations presented in Figure 4.

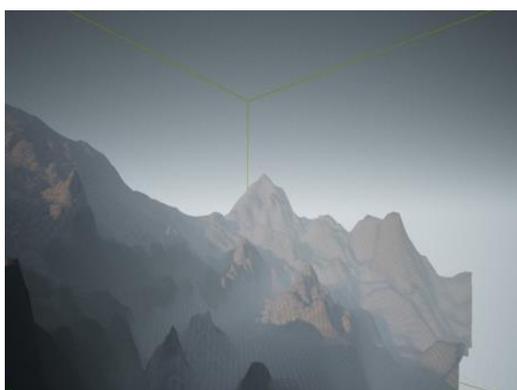


Figure 4. Create landscape luminance

#### 4. CONCLUSION

In this paper, we only present a classification method. In our future studies, we will combine the above-mentioned methods for obtaining better results. The different methods of evaluation and analysis of results are made in terms of their reliability, correct differentiation of the given objects, respectively related to their direction. In our future studies, we will include the four main directions. The neuro-biological point of view and interpretation should also be taken into account in the analysis of the characteristic selection step. For example, latency (response time) may vary due to specifics in the individual's mental capabilities, and therefore these characteristics are more informative in data processing.

#### ACKNOWLEDGEMENTS

This research would not have been possible without the financial assistance of the following project: "Application of the mixed reality in the training and pro-motion of the cultural heritage for the purposes of the in the university infor-mation environment" financed by National Science Fund of the Ministry of Education and Science of the republic of Bulgaria with Contract № KP-06-OPR 05/14 from 17.12.2018, led by Prof. DSc Irena Peteva.

#### REFERENCES

- [1] C. Umale, et al., "Feature Extraction Techniques and Classification Algorithms for EEG Signals to detect Human Stress-A Review," *International Journal of Computer Applications Technology and Research*, vol. 5, no. 1, pp. 8-14, 2016.
- [2] D. Friedman, et al., "Navigating virtual reality by thought: What is it like?" *Presence: Teleoperators and Virtual Environments*, vol. 16, no. 1, pp. 100-110, 2007
- [3] G. Panayotova, et al., "Modeling and data processing of information systems," *International Conference on Artificial Intelligence and Pattern Recognition (AIPR)*, pp. 1-5, 2016.
- [4] G. P. Dimitrov, et al., "Performance analysis of the method for social search of information in university information systems," *International Conference on Artificial Intelligence and Pattern Recognition (AIPR)*, pp. 1-5, 2016.
- [5] J. D. Moss and E. R. Muth, "Characteristics of head-mounted displays and their effects on simulator sickness," *Human Factors*, vol. 53, no. 3, pp. 308-319, 2011.

- [6] K. Hashimoto, et al., "Brief demonstration of olfactory and visual presentation using wearable olfactory display and head mounted display," in *Proceedings IEEE Virtual Reality Conference*, 2016.
- [7] M. Traykov, et al., "Algorithm for protein folding problem in 3D lattice HP model," *International Journal of Biology and Biomedicine*, vol. 3, pp. 16-21, 2018.
- [8] N. C. Burbules, "Rethinking the virtual," in J. Weiss, et al. (eds), *The International Handbook of Virtual Learning Environments*, pp. 37-58, 2006.
- [9] A. Ferezliev, et al., "Correlation between average and dominant height of middle-aged Douglas fir plantations in the north-west rhodopes," *Silva Balcanica*, vol. 19, no. 2, pp. 13-26, 2018.
- [10] N. Naseer and K. S. Hong, "fNIRS-based brain-computer interfaces: a review," *Frontiers in Human Neuroscience*, vol. 9, no.3, p. 172, 2015.
- [11] O. Aydemir, "Common spatial pattern-based feature extraction from the best time segment of BCI data," *Turkish Journal of Electrical Engineering and Computer Sciences*, vol. 24, no. 5, pp. 3976-3986, 2016.
- [12] R. Ron-Angevin and A. Diaz-Estrella, "Braincomputer interface: Changes in performance using virtual reality techniques," *Neuroscience Letters*, vol. 449, no. 2, pp. 123-127, 2009.
- [13] R. Mavrevski and M. Traykov, "Visualization software for hydrophobic-polar protein folding model," *Scientific Visualization*, vol. 11, no. 1, pp. 11-19, 2019.
- [14] R. Mavrevski, "Modelling in food technology," *WSEAS Transactions on Biology and Biomedicine*, vol. 16, pp. 75-89, 2019.
- [15] R. Mavrevski and M. Traykov, "Building and Selection an Optimal Mathematical Model Describing a Scientific or Engineering Process," *The 15th International Conference for Informatics and Information Technology (CIIT 2018)*, pp. 88-90, 2018.
- [16] S. Gao, et al., "Visual and auditory brain-computer interfaces," *IEEE Transactions on Biomedical Engineering*, vol. 61, no. 5, pp. 1436-1447, 2014.
- [17] Mirella Capozzi. Kant, "soemmerring and the importance of the sense of hearing," *Lexicon Philosophicum*, no. 2, 2014. [Online]. Available: <http://lexicon.cnr.it/index.php/LP/article/view/413/337>.
- [18] S. Tsankov, et al., "Research of the Impact of Interactive Educational Multimedia on Student's Motivation to Study Different Informatics Disciplines," *Conference name: 10th International Technology, Education and Development Conference*, pp. 5785-5791, 2016.
- [19] S. M. LaValle, "Virtual Reality," Cambridge university press, 2016. [Online]. Available: <http://vr.cs.uiuc.edu/>.
- [20] V. I. Petkova and H. H. Ehrsson, "If I Were You: Perceptual Illusion of Body Swapping," *PLoS ONE*, vol. 3, no. 12, pp. e3832, 2008.
- [21] N. Yanev, et al., "A New Classifier for Protein Fold Class Recognition," *Comptes Rendus de l'Académie Bulgare des Sciences*, vol. 71, no. 7, pp. 885-892, 2018.
- [22] S. Milanov, "Drawing of dependencies in data flows," PhD Thesis, 2017. [Online] Available: [https://fmi.uni-sofia.bg/sites/default/files/dissertation\\_work\\_of\\_phd/phd\\_thesis\\_s\\_milanov.pdf](https://fmi.uni-sofia.bg/sites/default/files/dissertation_work_of_phd/phd_thesis_s_milanov.pdf).
- [23] Y. Akatsuka and G. A. Bekey, "Compensation for end to end delays in a VR system," in *Proceedings IEEE Virtual Reality Annual International Symposium*, pp. 156-159, 1998.
- [24] W. Boothby, "An Introduction to Differentiable Manifolds and Riemannian Geometry, Revised, Volume 120, 2nd Edition," Academic Press, New York, 2002.
- [25] Y. M. H. Ng and C. P. Kwong, "Correcting the chromatic aberration in barrel distortion of endoscopic images," *Journal of Systemics, Cybernetics, and Informatics*, 2003.

## BIOGRAPHIES OF AUTHORS



**Ivan Trenchev.** Associate professor in Department of Electrical Engineering, Electronics and Automatics, Faculty of Engineering, member of University Center for Advanced, Bioinformatics Research, South-West University "Neofit Rilski", 66 Ivan Mihaylov Str., Blagoevgrad, Bulgaria and Associate professor in University of Library Studies and Information Technologies Sofia, Bulgaria. PhD on Informatics. Scientific Interest: virtual reality (VR), computer modelling and bioinformatics. He is one of the organizers of the XXVII Republican Student Programming Olympiad, 2015, <http://bcpc.eu/XXVII/>.



**Radoslav Mavrevski.** Associate professor in Department of Informatics, Faculty of Mathematics and Natural Sciences, member of University Center for Advanced, Bioinformatics Research, South-West University "Neofit Rilski", 66 Ivan Mihaylov Str., Blagoevgrad, Bulgaria. PhD on Informatics. Scientific Interest: programming, computer modelling, applied statistics and bioinformatics. He is one of the organizers of the South Eastern European Mathematical Olympiad for University Students (SEEMOUS) with International Participation, 2012, <http://seemous2012.swu.bg/> and XXVII Republican Student Programming Olympiad, 2015, <http://bcpc.eu/XXVII/>.



**Metodi Traykov.** Assistant in Department of Informatics in New Bulgarian University, Sofia, Bulgaria. Also assistant in Department of Informatics, Faculty of Mathematics and Natural Sciences, member of University Center for Advanced, Bioinformatics Research, South-West University "Neofit Rilski", 66 Ivan Mihaylov Str., Blagoevgrad, Bulgaria. PhD on Informatics. Scientific Interest: programming and bioinformatics. He is one of the organizers of the XXVII Republican Student Programming Olympiad, 2015, <http://bcpc.eu/XXVII/>.



**Ilire Zajmi-Rugova.** PhD students in University of Library Studies and Information Technologies. The topic of the dissertation is Influence of Television Pictures And Reality.